

Reliable isolation transformers from Tufvassons

Tufvassons have a wide range of transformers and over fifty years' experience of making them ourselves. We offer supreme quality isolation transformers for permanent installation, installation on DIN rails and movable variants that are connected by a mains lead. You can choose the product yourself, or ask our personnel to guide you to the right power supply.




Optimum isolation, removes interference

Isolation transformers are used when you need to adjust one voltage level to another, or separate protective earth from system earth. Using a transformer, you achieve optimum isolation and minimise interference at the same time. It is easy to install, and also has an American standard outlet, so it can also be used for 115 Volt equipment. Just like Tufvassons' other products, the isolation transformer is CE marked and protected against short circuits and overloading.


Type:	PFM 301						
Part.no.:	6748-0020						
Input voltage:	230V, 50-60 Hz.						
Output voltage:	115V						
Rated power:	260VA (2.3A)						
Weight:	4.1 kg						
Encapsulation class:	IP33						
Insulation class:	4.2 kV						
Ambient temperature:	max 40°C						
Design:	<ul style="list-style-type: none"> · Transformer potted in hard-setting plastic, with grey encapsulation made from impact resistant, self extinguishing thermoplastics (V0). · Double insulated (earth connection not required). · Short circuit and overload protection with resettable 1.8 A primary overload circuit breaker. · Primary 2 m mains lead with European plug (a damaged lead or plug must only be replaced by a spare part provided by the supplier). · Secondary 3-pole American outlet with touch-guarded recess, located on the right-hand long side. 						
Installation:	Free position or wall mounting with 3 screws. The two upper fixing holes are keyhole sockets.						
Manufacturing standard:	<table> <tr> <td>Security:</td> <td>EN 61558-1; EN 61558-2-4</td> </tr> <tr> <td>Emissions:</td> <td>EN 61 000-6-3; EN 61 000-6-4, IEC 62041</td> </tr> <tr> <td>Immunity:</td> <td>EN 61 000-6-1; EN 61 000-6-2, IEC 62041</td> </tr> </table>	Security:	EN 61558-1; EN 61558-2-4	Emissions:	EN 61 000-6-3; EN 61 000-6-4, IEC 62041	Immunity:	EN 61 000-6-1; EN 61 000-6-2, IEC 62041
Security:	EN 61558-1; EN 61558-2-4						
Emissions:	EN 61 000-6-3; EN 61 000-6-4, IEC 62041						
Immunity:	EN 61 000-6-1; EN 61 000-6-2, IEC 62041						



Wiring schedule and product illustration

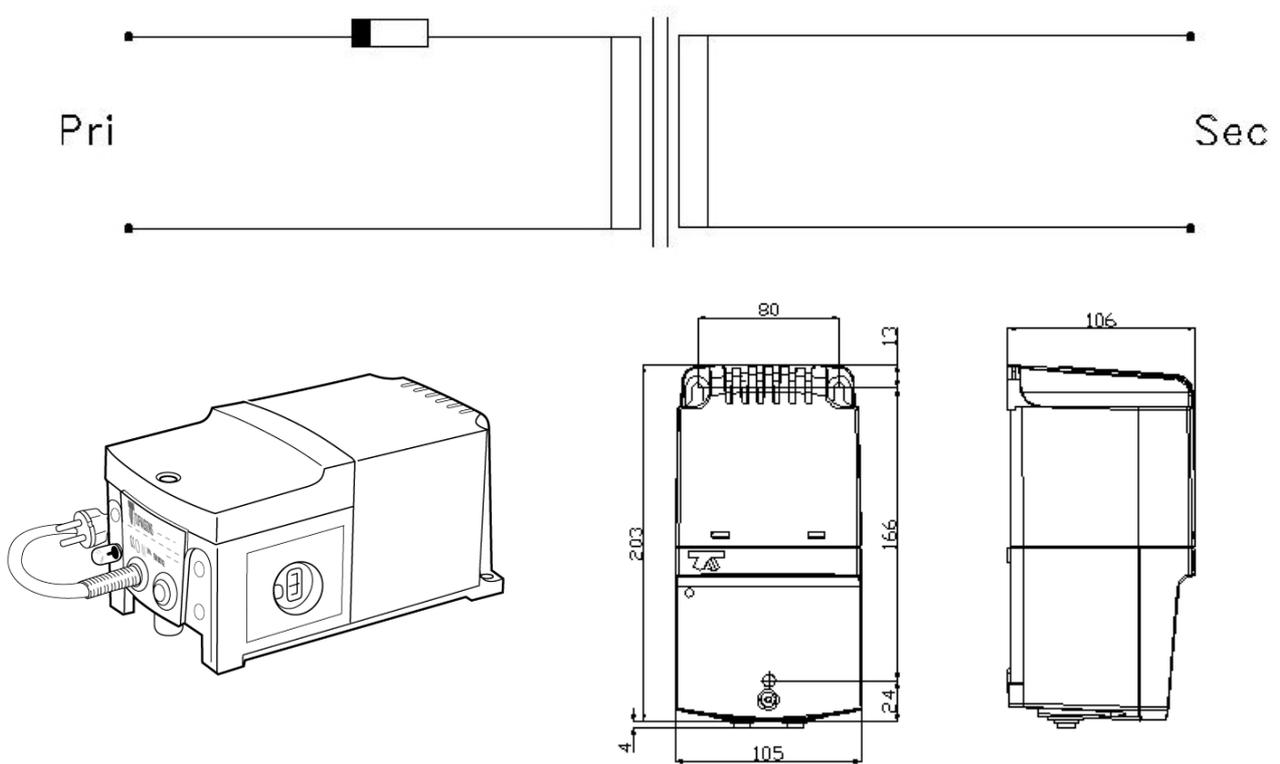

Loading diagram

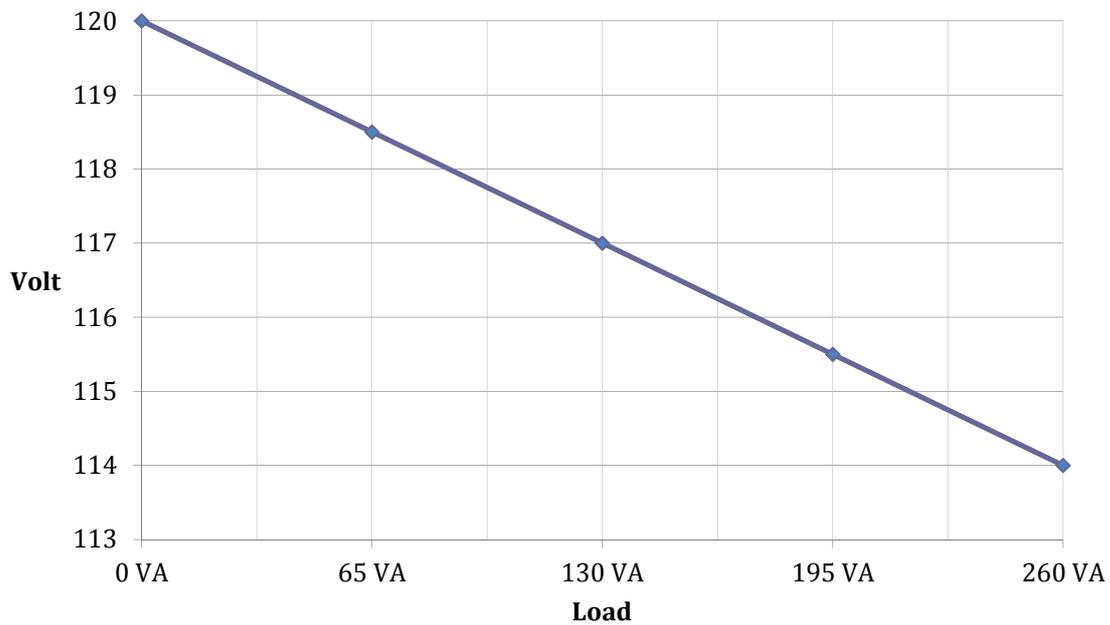

06/12

Tufvassons Transformator AB · Märstavägen 20 · 193 40 Sigtuna · Phone +46 (0) 8 594 809 00
 Fax +46 (0) 8 592 52 768 · E-mail reception@tufvassons.se · www.tufvassons.se

A company in the ADDTECH group.